

cable ties, clamps & mounts


- Manufactured from the toughest of materials, pure virgin nylon 6/6.
- Marine Grade™ nylon is insoluble in common solvents, alkalis, dilute mineral acids, most organic acids and most petrochemicals.
- Constructed with either natural or ultraviolet resistant black nylon in both standard and mounting head styles.
- Heavy duty locking mechanism.



Nylon Standard Cable Ties

Length (in)	Cable Tie Width	Maximum Bundle Diameter	Tensile Strength (lbs)	Color	Qty/Pkg	Item Number
3	.10"	5/8"	18	Natural	25	351112
7.6cm	2.5cm	1.6mm	8kg		100	351115
4	.10"	13/16"	18	Natural	25	351122
10.2cm	2.5mm	2mm	8kg		100	351125
				UV Black	25	351222
					100	351225
6	.14"	1-3/8"	45	Natural	25	351132
15.2cm	3.6mm	3.5mm	13.6kg		100	351135
				UV Black	25	351232
					100	351235
8	.17"	2-3/16"	75	Natural	10	351151
20.3 cm	4.3 mm	10 mm	34 kg		25	351152
					100	351155
					1000	351158
				UV Black	10	351251
					25	351252
					100	351255
					1000	351258
				Blue	25	351352
				Green	25	351452
				Red	25	351552
				Yellow	25	351652
8.5*	.29"	2"	175	Natural	25	351162
21.59 cm	7.4 mm	5 mm	79.5 kg		100	351165
				UV Black	25	351262
					100	351265

Length (in)	Cable Tie Width	Maximum Bundle Diameter	Tensile Strength (lbs)	Color	Qty/Pkg	Item Number
11	.17"	3"	75	Natural	25	351172
28 cm	4.3 mm	7.6 mm	34 kg		100	351175
				UV Black	25	351272
14	.17"	4"	75	Natural	6	351181
35.6 cm	4.3 mm	10.2 mm	34 kg		25	351182
					100	351185
					1000	351188
				UV Black	6	351281
					25	351282
					100	351285
					1000	351288
15*	.25"	4"	120	Natural	4	351202
38.1 cm	6.35 mm	10.2 cm	54.4 kg		25	351203
					100	351204
				UV Black	4	351206
					25	351207
					100	351208
24*	.29"	7"	175	Natural	25	351196
60.96 cm	7.37 mm	17.78 cm	79.38 kg		100	351197
				UV Black	25	351296
					100	351297

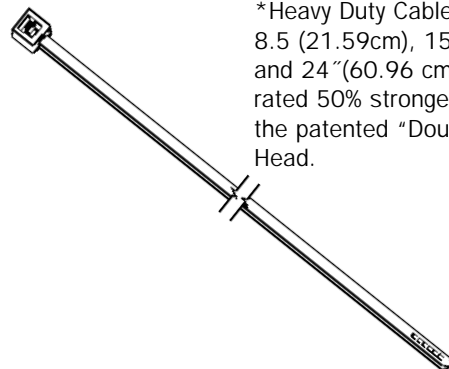

*Heavy Duty Cable Ties
8.5 (21.59cm), 15" (38.1 cm)
and 24" (60.96 cm) cable ties are
rated 50% stronger and feature
the patented "Double-Lock™"
Head.