


# connectors & terminals


## Disconnects (.250 /6.4 mm Tab Size) Nylon Insulated with Insulation Grip

Wire Range	Gender	Qty/ Pkg	Item Number
22 - 18 0.3-0.8 mm <sup>2</sup>	Female	4	230808
		25	210808
		100	220808
		500	222808
	Male	4	230809
		25	210809
		100	220809
		500	222809
16 - 14 1-2 mm <sup>2</sup>	Female	5	230818
		25	210818
		100	220818
		500	222818
	Male	5	230819
		25	210819
		100	220819
		500	222819
12 - 10 3-5 mm <sup>2</sup>	Female	4	230828
		25	210828
		100	220828
		500	222828
	Male	4	230829
		25	210829
		100	220829
		500	222829

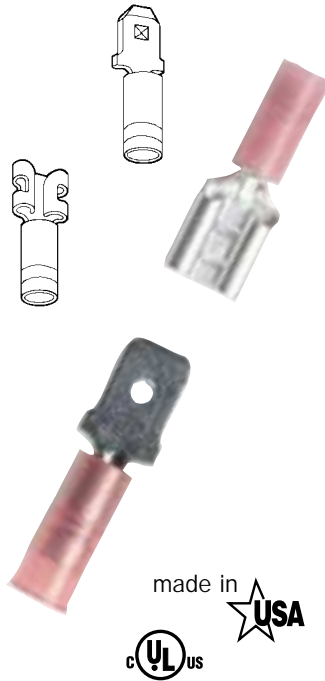

## Fully Insulated Disconnects (.250 /6.4 mm Tab Size) Nylon Insulated with Insulation Grip

Wire Range	Gender	Qty/ Pkg	Item Number
22 - 18 0.3-0.8 mm <sup>2</sup>	Female	4	231408
		25	211408
		100	221408
		500	222908
	Male	4	231409
		25	211409
		100	221409
		500	222909
16 - 14 1-2 mm <sup>2</sup>	Female	4	231418
		25	211418
		100	221418
		500	222918
	Male	4	231419
		25	211419
		100	221419
		500	222919
12 - 10 3-5 mm <sup>2</sup>	Female	3	231428
		25	211428
		100	221428
		500	222928
	Male	3	231429
		25	211429
		100	221429
		500	222929

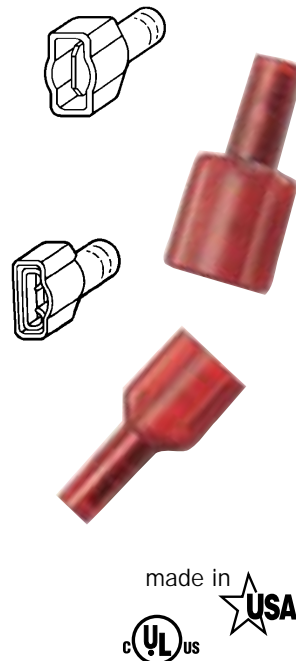

ANCOR Recommends

Using tool #702015 for professional installations.

Trouble free full cycle mechanism assures consistent terminations.

This tool provides the level of performance required for the most stringent commercial applications.

