

Twisted Pairs w/ Shield

Premium Tinned Copper


- Recommended for all metal boats and around sensitive electronics.
- Ultra flexible stranding is tinned for corrosion resistance.
- 93% Tinned copper shield for maximum EMI and RFI rejection.
- Features two conductors, red and black.

Marine Grade™ Twisted Pairs Wire Specs

Cable Size	Nominal O.D.(in)	Wt. Per 1000'(lbs.)
14/2	.330 8.4 mm	73.2 33.3 kg

Cable Size	Spool Length(ft)	Item Number
14/2	25	141402
2x2 mm ²	100	141410
	250	141425
	500	141450

made in 

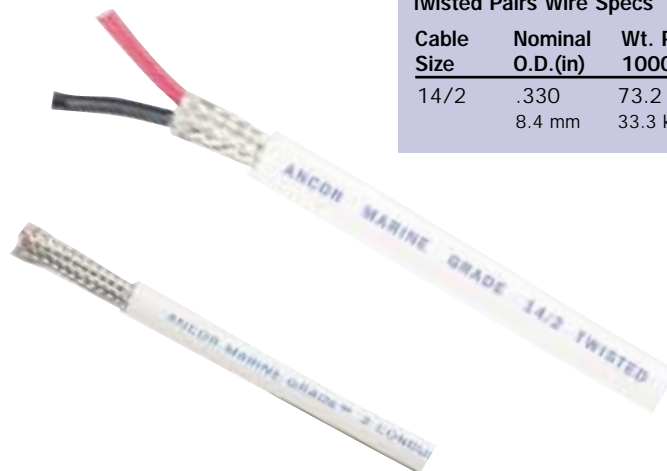

Coaxial Cable

Premium Tinned Copper

- Features signal loss ratios of up to 50% less than other coaxial cables.
- Consists of a tinned copper center conductor as well as tinned copper outer braid for corrosion resistance and easy soldering.
- 96% braid for best signal strength and least interference.
- UV inhibited white jacket for longest life.



Cable Size	Spool Length(ft)	Item Number
RG 58CU	25	150502
	100	150510
	250	150525
	500	150550
	1000	150560
RG 59U	25	151002
	100	151010
	250	151025
	500	151050
	1000	151060

Cable Size	Spool Length(ft)	Item Number
RG 8X	25	151502
	100	151510
	250	151525
	500	151550
	1000	151560
RG 8U	25	152002
	100	152010
	250	152025
	500	152050

made in 

Coaxial Cable Specs

100% Tinned Copper Center Conductor and Braid

Wire Type	Insulation Material	Nominal O.D.	AWG	Conductor Stranding	Braid Coverage	Wt. per 1000'(lbs.)	Impedance (Ohms)	Capacitance/Ft.	@50MHz	Attenuation/100': @100MHz	@1000MHz	Volocity of Propagation
RG58C/U	PVC*	3/16" 4.8 mm	20	19/33	96%	26 11.8 kg	50	30.8 pF	3.3db	4.9db	21.5db	66%
RG59U	PVC	1/4" 6.4 mm	23	Solid**	96%	36 16.3 kg	75	20.5 pF	2.4db	3.4db	12.0db	66%
RG8X	PVC	1/4" 6.4 mm	16	19/29	96%	40 18.1 kg	50	26.0 pF	2.5db	3.7db	13.5db	78%
RG8U	PVC	13/32" 10.3 mm	13	7/21	96%	110 50 kg	52	29.5 pF	1.3db	2.2db	8.9db	66%

*Non-Contaminating insulation

**Copperweld