


cable ties, clamps & mounts

Stainless Steel Cable Ties

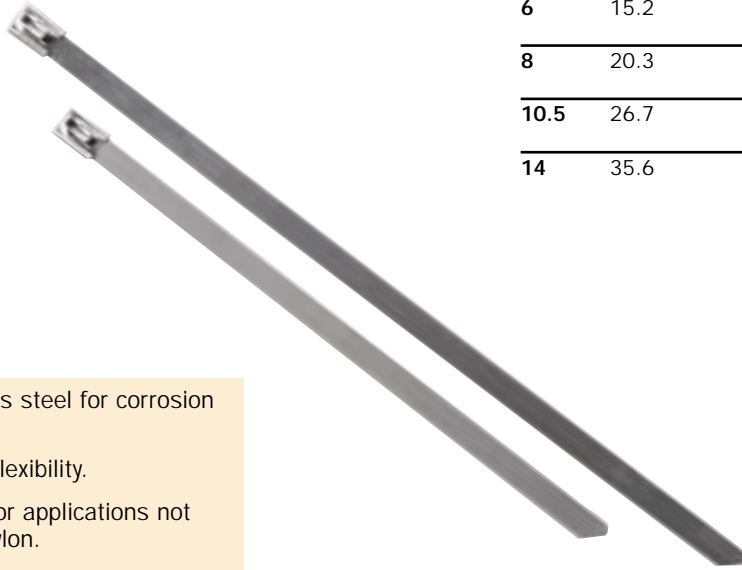

Length(in)	Length(cm)	Cable Tie Width	Qty/Pkg	Item Number
6	15.2	.31" 7.9 mm	10	403106
8	20.3	.31" 7.9 mm	10	403108
10.5	26.7	.31" 7.9 mm	10	403110
14	35.6	.31" 7.9 mm	10	403114

- T304 Stainless steel for corrosion resistance.
- Annealed for flexibility.
- Long lasting for applications not suitable for nylon.
- Heavy duty locking mechanism.

Stainless Steel Cushion Clamps

Nominal Diameter (in)	Diameter (mm)	Qty/Pkg	Item Number
3/16	4.8	10	403182
1/4	6.4	10	403252
5/16	7.9	10	403312
3/8	9.5	10	403372
7/16	11.1	10	403432
1/2	12.7	10	403502
9/16	14.3	10	403562
5/8	15.9	10	403622
3/4	19	10	403752
7/8	22.2	10	403872
1	25.4	10	403892
1 1/4	32	10	403902
1 1/2	38	10	404152
1 3/4	44.4	10	404172
2	51	10	404202
2 1/2	63.5	10	404252
3	76	10	404302



Cable Clamp Dimensions

Nominal Diameter	Thickness	Width	Screw Size
1/8	3.2 mm	0.040 3/8 9.5 mm	#8 4 mm
3/16	4.8 mm	0.040 3/8 9.5 mm	#8 4 mm
1/4	6.4 mm	0.040 3/8 9.5 mm	#8 4 mm
5/16	7.9 mm	0.040 3/8 9.5 mm	#8 4 mm
3/8	9.5 mm	0.040 3/8 9.5 mm	#8 4 mm
7/16	11 mm	0.060 1/2 12.7 mm	#10 4.8 mm
1/2	12.7 mm	0.060 1/2 12.7 mm	#10 4.8 mm
5/8	15.9 mm	0.060 1/2 12.7 mm	#10 4.8 mm
3/4	19 mm	0.060 1/2 12.7 mm	#10 4.8 mm
7/8	22.2 mm	0.060 1/2 12.7 mm	#10 4.8 mm
1	25.4 mm	0.060 1/2 12.7 mm	#10 4.8 mm
1-1/4	31.8 mm	0.060 1/2 12.7 mm	#10 4.8 mm
1-1/2	38 mm	0.060 1/2 12.7 mm	#10 4.8 mm
1-3/4	38 mm	0.060 1/2 12.7 mm	#10 4.8 mm
2	38 mm	0.060 1/2 12.7 mm	#10 4.8 mm
2-1/2	38 mm	0.060 1/2 12.7 mm	#10 4.8 mm
3	38 mm	0.060 1/2 12.7 mm	#10 4.8 mm

#8 = 0.167 / #10 = 0.203

- Meets ABYC specifications.
- Temperature rating of -40°F to 300°F.
- EPDM insulator is temperature, water, fuel, oil and acid resistant.